




Panel Light

BA-PL3030 / 3060 / 6060 / 6262 / 30120 / 60120

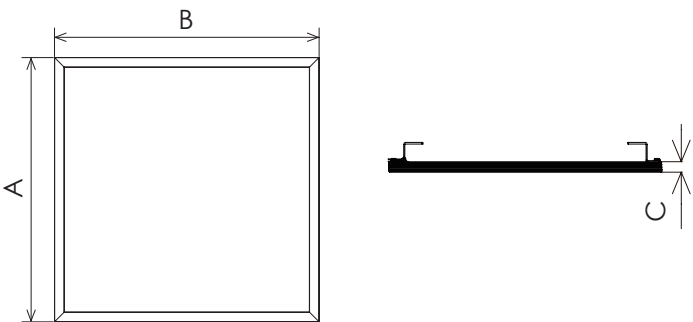

Appearance Parameters

Model	Dimension (mm)			Product Size (mm)	Cut out (mm)	Net Weight (kg)
	A	B	C			
BA-PL3030	295	295	10	295x295x10	300x300	1.4
BA-PL3060	595	295	10	595x295x10	600x300	2.5
BA-PL6060	595	595	10	595x595x10	600x600	4.2
BA-PL6262	620	620	10	620x620x10	620x620	3.9
BA-PL30120	1195	295	10	1195x295x10	1200x300	4.2
BA-PL60120	1195	595	10	1195x595x10	1200x600	7.5

Technical Specifications


Voltage: AC100-240V / AC200-240V
Power: 18W / 36W / 45W / 56W / 72W
Power Factor: ≥0.9
Beam angle: 120°
CCT: 3000K 4000K 5000K 5700K

Lifespan: 40000hrs
CRI: ≥80
IP: 40
Dimmable: Triac dimmable & DALI dimmable
Surface color: Silver / White


Model	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
	3000K	4000K	5000K	5700K	3000K	4000K	5000K	5700K
BA-PL3030-18W	1200	1300	1300	1250	1100	1200	1200	1150
BA-PL3030-36W	2550	2650	2650	2600	2330	2360	2360	2300
BA-PL3060-36W	2550	2650	2650	2600	2330	2360	2360	2300
BA-PL6060-36W	2550	2650	2650	2600	2330	2360	2360	2300
BA-PL6060-45W	3150	3270	3270	3240	2900	3050	3050	3000
BA-PL6060-56W	3750	4200	4120	4100	3450	3860	3800	3800
BA-PL6262-36W	2550	2650	2650	2600	2330	2360	2360	2300
BA-PL6262-45W	3150	3270	3270	3240	2900	3050	3050	3000
BA-PL30120-45W	3150	3270	3270	3240	2900	3050	3050	3000
BA-PL30120-56W	3750	4200	4120	4100	3450	3860	3800	3800
BA-PL30120-72W	4890	4930	4930	4900	4500	4530	4530	4500
BA-PL60120-45W	3150	3270	3270	3240	2900	3050	3050	3000
BA-PL60120-72W	4890	4930	4930	4900	—	—	—	—

Installation

1.Recessed into ceiling

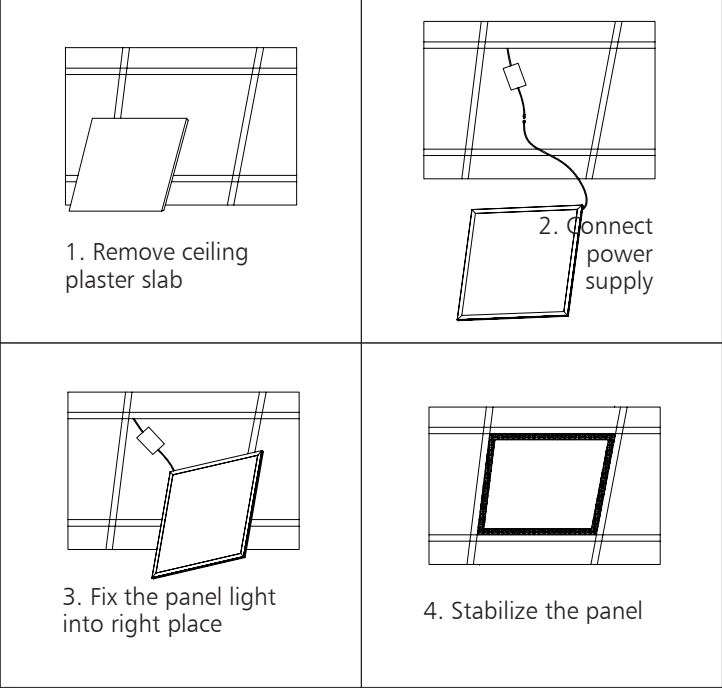

2. Suspending

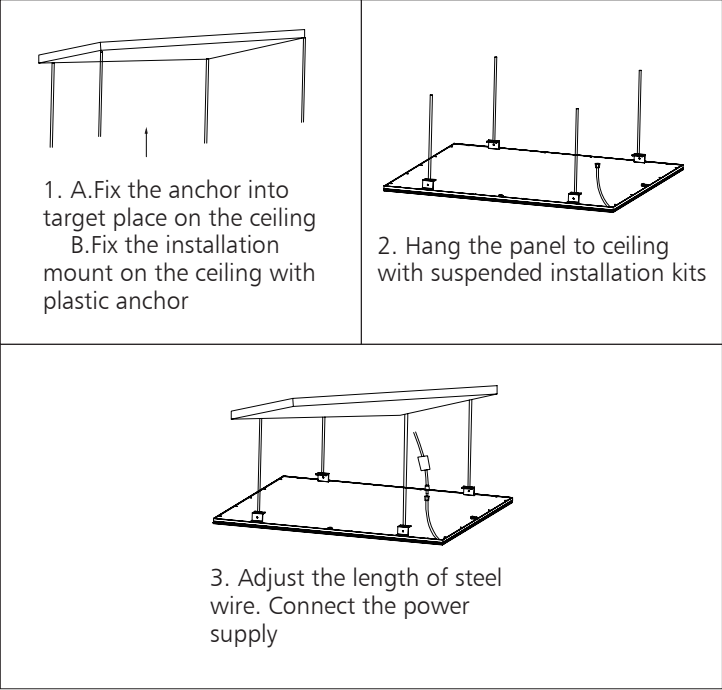

3. Surface mounted

