


InfraLan cable F/UTP Cat.6 LSZH, Class D_{s2,d2,a1}

DK-ICD6FUW-V1

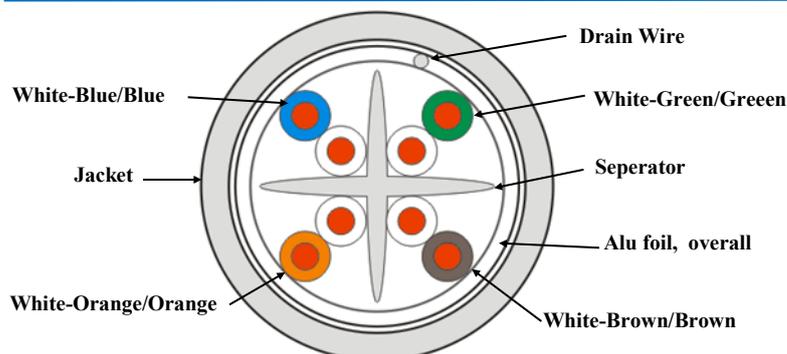

Application/Approvals

Application:	Primary (Campus), Secondary (Riser), Tertiary (Horizontal) IEEE 802.3an: 10Base-T, 100Base-TX, 1000Base-T, IEEE 802.5, 16Mbit, ISDN, TPDDI, ATM IEEE 802.3af-2002: POE, IEEE 802.3at: POE+(30W), IEEE 802.3bt: PoE+ (90W)
Standards:	ISO/IEC 11801-1:2017, ISO/IEC11801-2:2017, EN50173-1:2018, EN50173-2:2018
Fire protection:	IEC 60332-1
Reaction to fire:	EN50399, EN50575
Halogenfree:	IEC 60754
Low smoke:	IEC 61034
Segregation Class:	C, EN50174-2
CPR:	Class Dca,s2,d2,a1

Construction

Conductor:	Solid Bare Copper Wire Nom.OD = 0,54mm (AWG23) +/-0,01
Conductor Insulation:	HDPE, Diameter = 1,05 +/-0,08mm
Outer Diameter:	7,2mm +/-0,2
Sheath material:	LSZH (low Smoke zero Halogen) RoHS Compliant
Shielded pair:	No
Overall Shielded:	Aluminium foil cover overall
Drain Wire:	Tinned copper, 0,30 +/-0,008
Sheath Color:	White RAL9003
Sheath printing:	Letter hight 3,0mm +/-0,3 "Description + batchno. + meter marking"
Core Color pair 1:	White-blue / blue
Core Color pair 2:	White-Orange/ Orange
Core Color pair 3:	White-Green / Green
Core Color pair 4:	White-Brown / brown

Electrical Characteristics (at 20°C)

Impedance :	1-100Mhz: 100Ω +/-15 - 100-250Mhz: 100Ω +/-20
DC Resistance :	< 91,3Ω/1Km
Velocity riation (NVP) :	69%
High Voltage Test :	2,5KV/DC 2 sec.



InfraLan cable F/UTP Cat.6 LSZH, Class D_{s2,d2,a1}

DK-ICD6FUW-V1

Mechanical Characteristics

Bending Radius :	4 x cable O.D. without load / 8 x cable O.D. with load
Temperature range :	During Operation: -20°C - +75°C / During Installation: -0°C - +50°C
Pull Force :	100N

Technical Performance (100 mtr)

Frequency MHz	RL dB	Att. (20°C) dB/100m	NEXT dB	PSNEXT dB	ELFEXT dB	PSELFEXT dB
4,0	23,0	3,8	66,3	63,3	56,0	53,0
10,0	25,0	6,0	60,3	57,3	48,0	45,0
16,0	25,0	7,6	57,2	54,2	43,9	40,9
20,0	25,0	8,5	55,8	52,8	42,0	39,0
31,3	23,6	10,7	52,9	49,9	38,1	35,1
62,5	21,5	15,5	48,4	45,4	32,1	29,1
100,0	20,1	19,9	45,3	42,3	28,0	25,0
155,5	18,8	25,3	42,4	39,4	24,2	21,2
175,0	18,4	27,1	41,7	38,7	23,1	20,1
200,0	18,0	29,1	40,8	37,8	22,0	19,0
250,0	17,3	33,0	39,3	36,3	20,0	17,0

Package Information

305 mtr. drum :	Dimension: HxDxW, 40x40x32cm Carton box with label
	Netto weight: 16,0 kg
	Brutto weight: 18,0 kg

Ordering Information

Order no.	EAN	Description	Color	Packsize
DK-ICD6FUW.305-V1	5705721137527	InfraLan Cable Cat.6, F/UTP, LSZH, Class Dca	White	305 mtr.