

CCT Adjustable LED Downlight SWAN3 Series

The image displays three circular LED downlights. The top light is a large, white, recessed ceiling light with a visible LED chip in the center. Below it are two smaller, circular downlights: one with a silver finish and one with a black finish, both also showing the central LED chip.



Swan3 - 18V - 9WR

Series name

Driver output volt


Power





Reflector

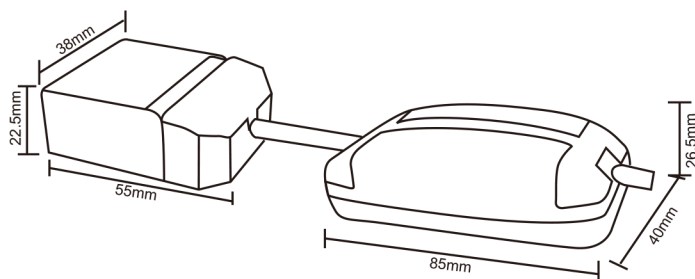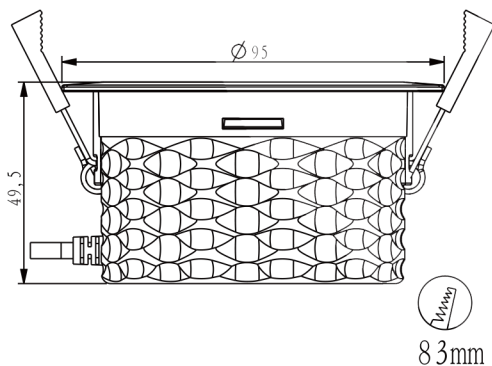


P/N	Swan3 - 18V - 9WR
LED Source	Bridgelux COB
Input Voltage	110V/220V
Power	9W
PF	0.95
Luminous Flux	620lm
CCT Range	2000K-2800K
Ra	92
Beam Angle	45° 60°
Fireproof grade	V0
Fast Wiring	Yes
Dim	Yes
Size	Φ 95*49.5 mm
Operation Temperature	-20℃+50℃
Lamp working temperature	68℃
Life Span	50000h

Ra=92.6




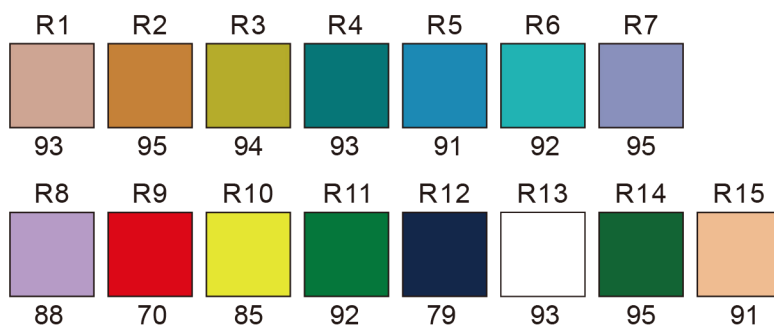


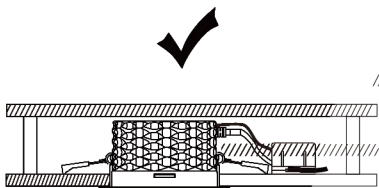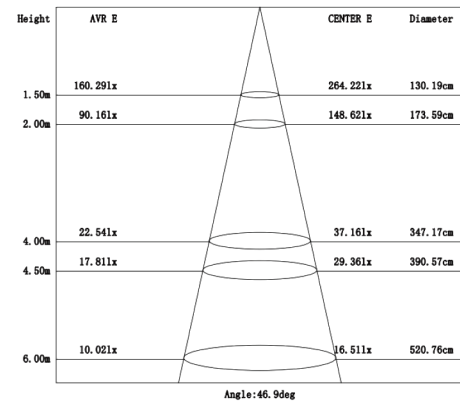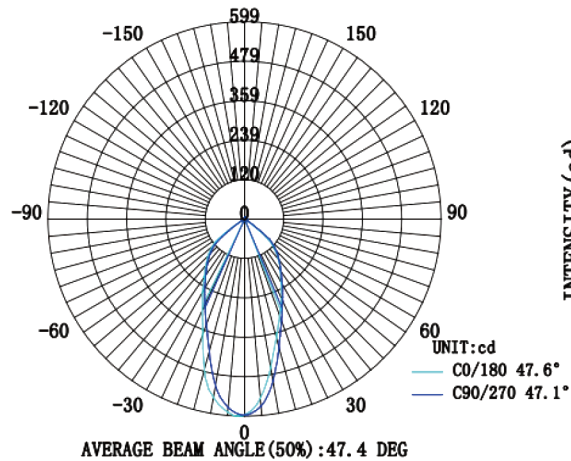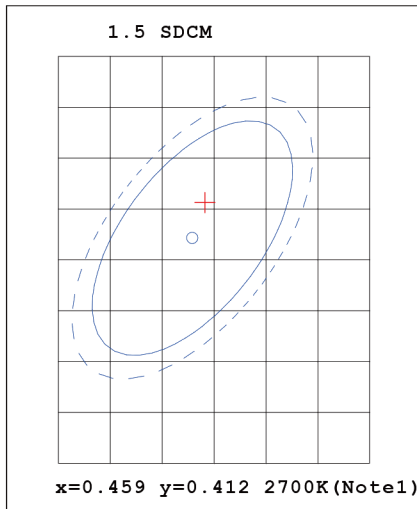


Alt A:

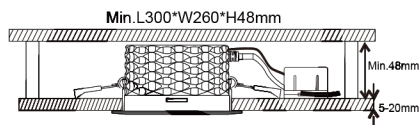

Alt B:

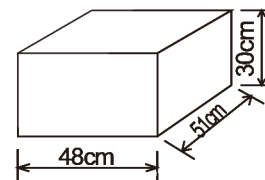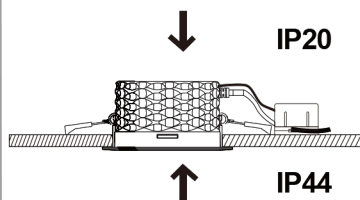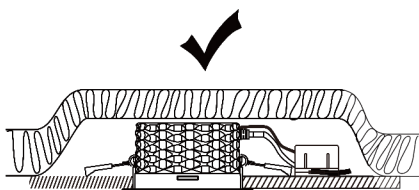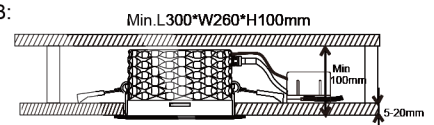

Packaging
 40pcs/carton
 N.W: 15KG
 G.W: 17 KG



Compatible Dimmers

ELKO: GLE400
 ABB: 2550UJGL-214P/2210UJ-214P
 SCHNEIDER: T53000/WDE002299
 PAS: HD300
 JUNG: 243EX
 KAOYI: KDT-500E2/ KDT-500E
 C01TEC: B327
 ELTAKO: EUD61NPN-UC
 NIKO: SE45004