


Led Street Light

JD-1047

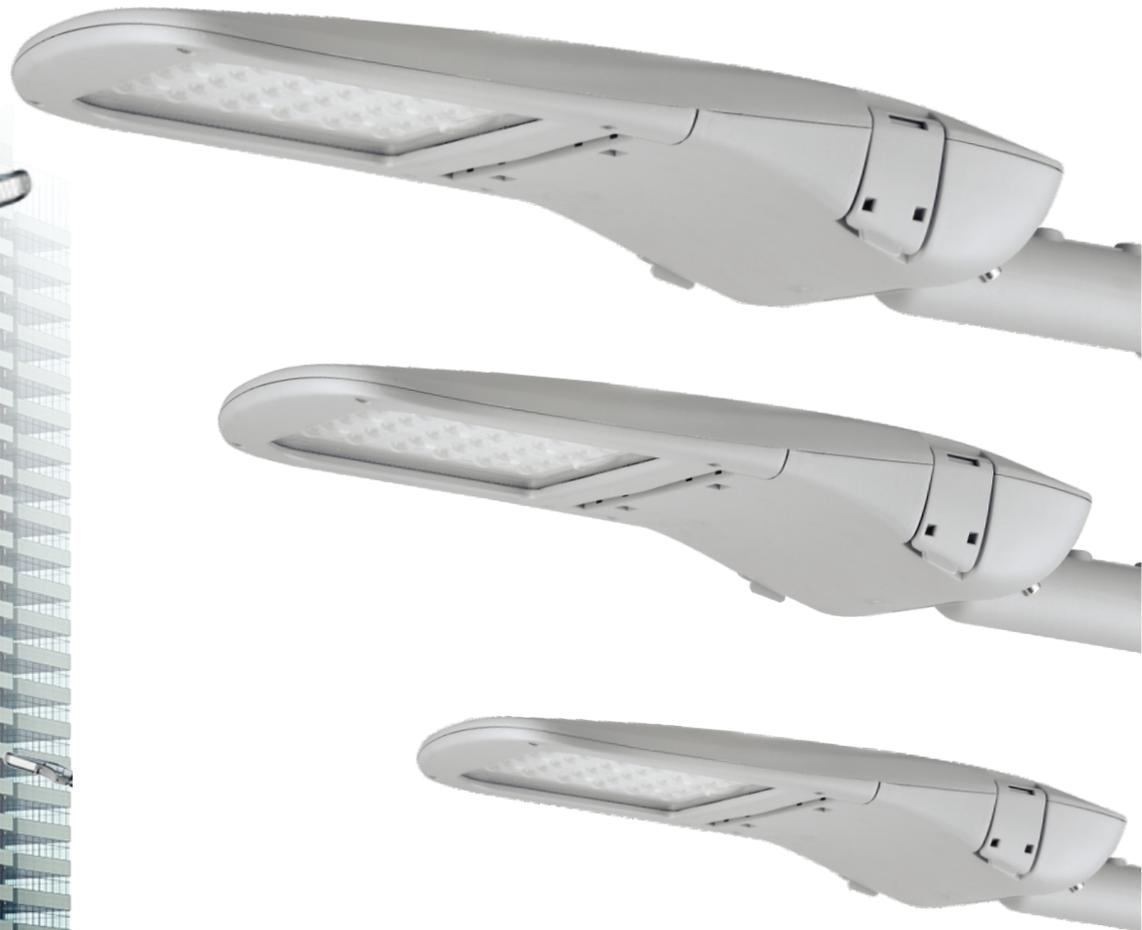

Cree/Philips led + Inventronics

- Modern fashion design of appearance, made the light become an artwork, Integrated with the environment perfectly, to make it as top project.
- Used in high strength aluminum die casting material, surface anit-ageing electrostatic spray processing, super resistance to corrosion.
- High transparent Tempered glass
- Input Voltage: AC110-277V, 50/60Hz, IP66, IK09
- Horizontal installation : +10~ -10° adjustable
- Vertical installation : +10~ -10° adjustable
- Different types lens for choice
- Windy area : small size : 345 cm²
medium size : 503 cm²
big size : 748 cm²
- Spare parts for choice
 - 10 kv/20kv SPD
 - 0-10v dimming driver
 - auto switch
 - Nema socket
- 5 years warranty



Specification


Product Code	JD-1047A	JD-1047B	JD-1047C	JD-1047D	JD-1047E	JD-1047F	JD-1047G	JD-1047H	JD-1047I
LED Current (mA)	525mA	525mA	400mA	450mA	467mA	475mA	480mA	525mA	650mA
LED Quantity	16pcs CREE XTE	24pcs CREE XTE	36pcs CREE XTE	40pcs CREE XTE	48pcs CREE XTE	64pcs CREE XTE	80pcs CREE XTE	88pcs CREE XTE	96pcs CREE XTE
Rated Power	30W	40W	50W	60W	70W	100W	120W	150W	200W
Color Temperature	6500/4000/3000K								
Luminous Flux	120LUM/W								
Input Voltage	AC100-277V								
Frequency Range	50/60Hz								
CRI	RA75								
Temperature of working condition	-40°C - 45°C								
humidity of working condition	20%-90%	20%-90%	20%-90%	20%-90%	20%-90%	20%-90%	20%-90%	20%-90%	20%-90%
LED life time	70000h								
Protection Grade	IP66								
Installation Pipe Dia	Φ60mm/ Φ42mm	Φ76mm	Φ76mm	Φ76mm					
Installation Height	3-4m	4-5m	5-6m	5-6m	7-8m	8-9m	9-10m	10-11m	11-12m
Net Weight	6.4kg	6.5kg	6.8kg	10kg	10.5kg	11kg	11.4kg	11.8kg	12kg
Gross Weight	7.4kg	7.5kg	7.8kg	11kg	11.5kg	12kg	12.4kg	12.8kg	13kg
Product Size	573x245x120mm	573x245x120mm	573x245x120mm	717*320*130mm	717*320*130mm	717*320*130mm	867*392*159mm	867*392*159mm	867*392*159mm
Packing Size	635*285*170mm	635*285*170mm	635*285*170mm	770*365*165mm	770*365*165mm	770*365*165mm	920*440*200mm	920*440*200mm	920*440*200mm

LED Philips Luxeon 3030 FOR CHOICE


Packing size is outer size of box
 All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.

Product Dimension


BIG SIZE JD-1047G/H/I

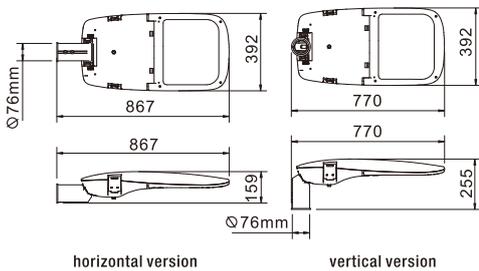



MEDIUM SIZE JD-1047D/E/F

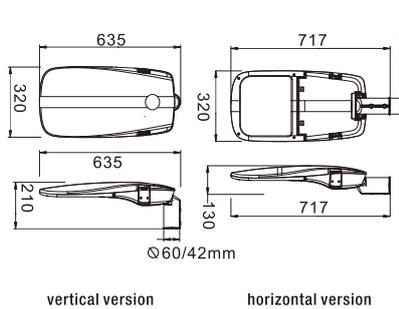

SMALL SIZE JD-1047A/B/C

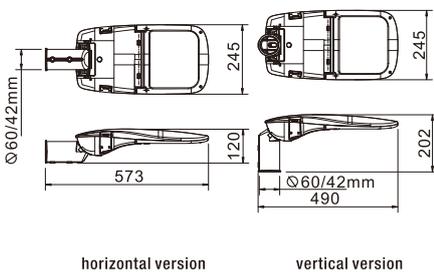


Light Distribution Curve

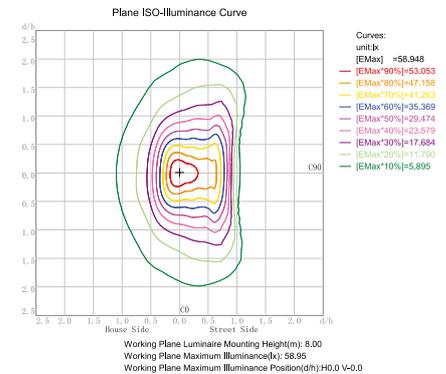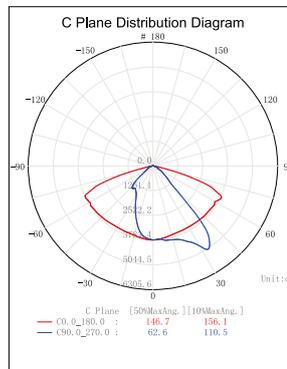

AC100-277V Input Voltage	Hz 50/60 Frequency Range	PF >0.92 Power Factor	<15% THD	CRI 75 Color Rendering Index	-40-45°C Temperature of Working Condition	10~90% Humidity of Working Condition	70000h Life Time	IP66 Protection Grade
-----------------------------	--------------------------------	-----------------------------	-------------	------------------------------------	--	---	---------------------	--------------------------

JD-1047 LED STREET LIGHTS


Detachable light fixture, Vertical and horizontal installation both are ok.



Free tool maintenance

PERSONALIZED CONFIGURATION


Internal components are configured according to customer requirement, meet the personalized needs
Electric insulation class II

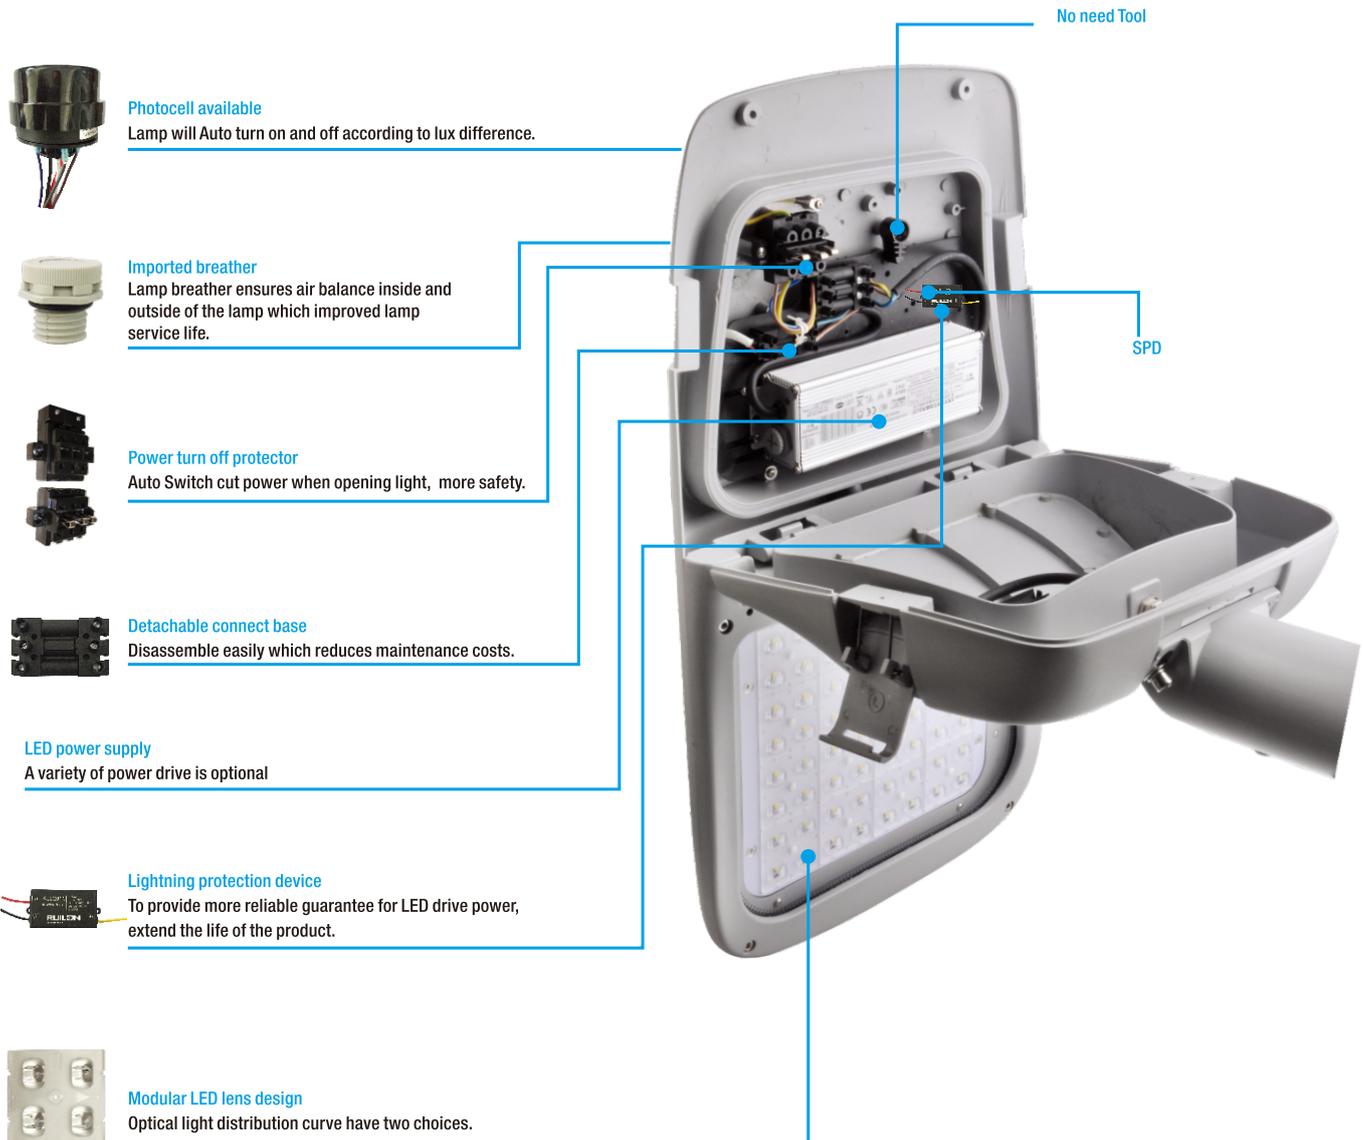

4 in 1



6 in 1




8 in 1




12 in 1




14 in 1




LENS:12in1
LED:3030




TYPE II-S
150°x75°
316011




TYPE II-S
140°x90°
316033




TYPE II-M
148°x60°
316035




TYPE III-S
145°x45°
316034




TYPE III-M
145°x55°
316036



TYPE IV-S
130°x90°
316039




TYPE V-S
60°x90°
316012




TYPE V-S
90°x90°
316021

Adding.....


LENS:4in1
LED:5050
Test Model : JD-1047I-5050




TYPE II-S
140°x55°
316005




TYPE II-M
150°x60°
316027




TYPE II-M
150°x70°
316045




TYPE III-S
145°x85°
316029




TYPE III-S
145°x70°
316047




TYPE III-M
155°x60°
316030




TYPE III-M
150°x90°
316046



TYPE V-S
120°x65°
316026




TYPE IV-M
150°x60°
316037




TYPE II-S
150°x100°
316043


Suitable for 1045W, 1062W
and other line hanging lamps




TYPE V-S
155°x155°
316022



TYPE V-S
142°x142°
316049



TYPE II-M
150°x75°
316048



TYPE IV-M
145°x95°
316050

Adding.....