


SPECIFICATIONS

P/N	Swan3 - 18V - 9*2WSR
LED Source	Bridgelux COB
Input Voltage	110V/220V
Power	9W
PF	0.95
Luminous Flux	620lm
CCT Range	2000K-2800K
Ra	92
Beam Angle	45° 60°
Fireproof grade	V0
Fast Wiring	Yes
Dim	Yes
Size	Φ95*49.5 mm
Operation Temperature	-20°C+50°C
Lamp working temperature	68°C
Life Span	50000h





Swan3 - 18V - 9*2WSR

Series name Driver output volt Power Reflector

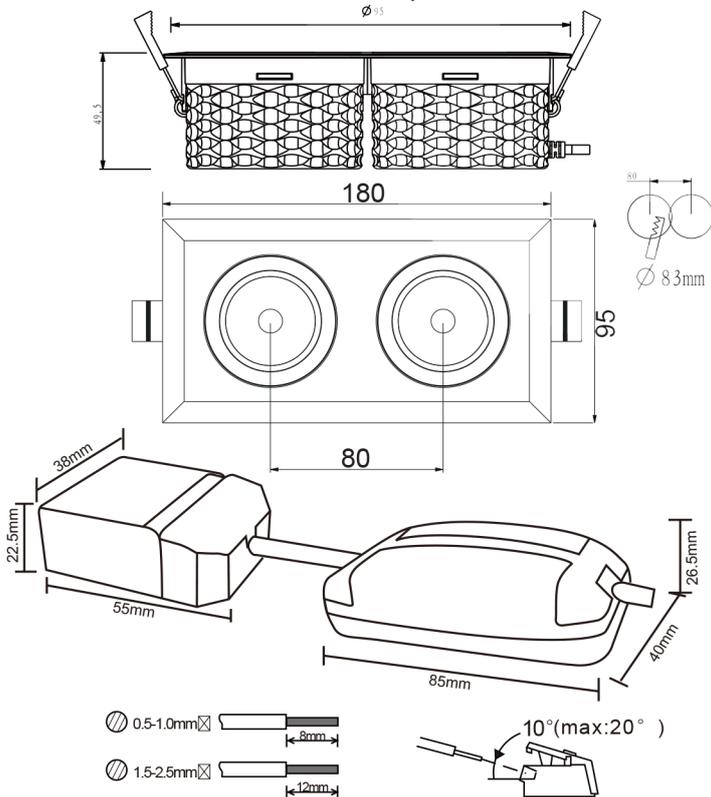


Ra=92.6

R1	R2	R3	R4	R5	R6	R7	
93	95	94	93	91	92	95	
R8	R9	R10	R11	R12	R13	R14	R15
88	70	85	92	79	93	95	91

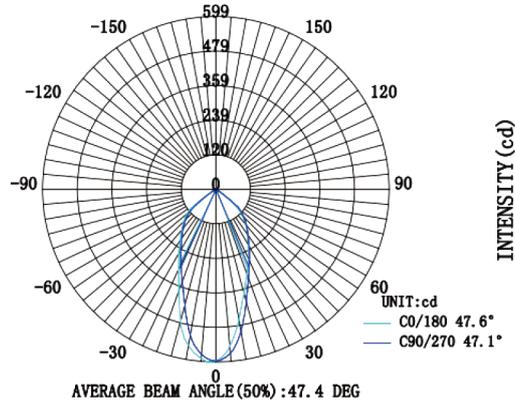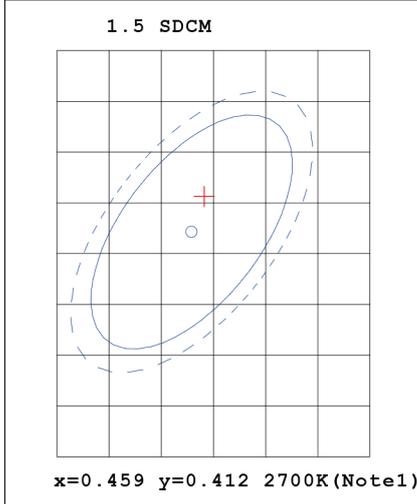


Height	AVR E	CENTER E	Diameter
1.50m	160.291x	264.221x	130.19cm
2.00m	90.161x	148.621x	173.59cm
4.00m	22.541x	37.161x	347.17cm
4.50m	17.811x	29.361x	390.57cm
6.00m	10.021x	16.511x	520.76cm





Angle: 46.9deg

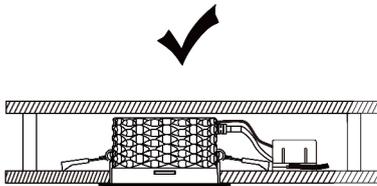


Alt A:



Alt B:

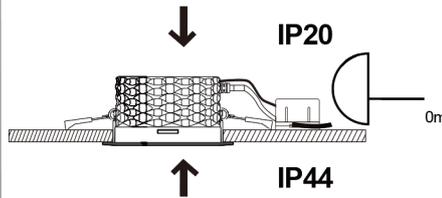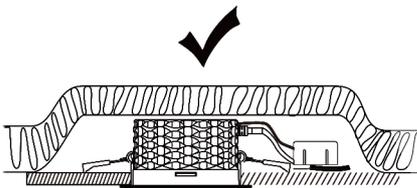

Packaging
 40pcs/carton
 N.W: 15KG
 G.W: 18KG



Compatible Dimmers

- ELKO: GLE400
- ABB: 2550UJGL-214P/2210UJ-214P
- SCHNEIDER: T53000/WDE002299
- PAS: HD300
- JUNG: 243EX
- KAOYI: KDT-500E2/ KDT-500E
- C01TEC: B327
- ELTAKO: EUD61NPN-JC
- NIKO: SE45004