

TUNDRA

TUV CE C-TICK

JD-1047 LED STREET LIGHTS

Vertical and horizontal installation both ok.


- Modern fashion design of appearance, made the light become an artwork, integrated with the environment perfectly, to be made as top project.
- Main material used in high strength aluminum die casting material, surface anit-ageing electrostatic spray processing, super resistance to corrosion.
- Glass cover, high strength impact resistance.
- Input Voltage: AC110-277V, 50/60Hz, IP65, IK08




AC100-277V	Hz 50/60	PF >0.9	THD <15%	CRI 75	-35~90°C	10~90%	50000h	IP66
------------	----------	---------	----------	--------	----------	--------	--------	------

Product Dimension

JD-1047A / JD-1047B / JD-1047C / JD-1047D / JD-1047E / JD-1047F

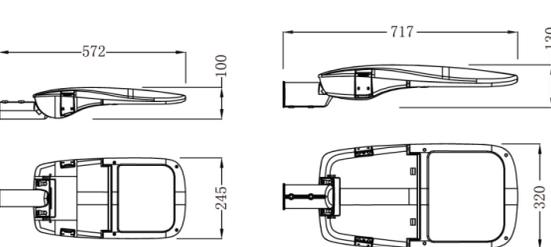

JD-1047G / JD-1047H / JD-1047I / JD-1047J / JD-1047K / JD-1047L



Packing size is outer size of box
All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.

TUNDRA

TUV CE C-TICK

FREE MAINTENANCE TOOLS




Specification

Product Code	JD-1047A	JD-1047B	JD-1047C	JD-1047D	JD-1047E	JD-1047F
LED Quantity	16pcs	24pcs	36pcs	40pcs	48pcs	64pcs
Rate Power	30W	40W	50W	60W	70W	100W
Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
Luminous Flux	130LM/W	130LM/W	130LM/W	130LM/W	130LM/W	130LM/W
PF	0.92	0.92	0.92	0.92	0.92	0.92
Installation Pipe Dia	Φ42/60mm	Φ42/60mm	Φ42/60mm	Φ42/60mm	Φ42/60mm	Φ42/60mm
Installation Height	4-6m	4-6m	4-6m	6-8m	6-8m	8-10m
Net Weight	4kg	4kg	4.2kg	6.6kg	6.6kg	7kg
Gross Weight	5kg	5kg	5.2kg	8kg	8kg	8.5kg
Product Size	572*245*100mm	572*245*100mm	572*245*100mm	717*320*130mm	717*320*130mm	717*320*130mm
Packing Size	610*280*130mm	610*280*130mm	610*280*130mm	770*365*165mm	770*365*165mm	770*365*165mm

Product Code	JD-1047G	JD-1047H	JD-1047I
LED Quantity	80pcs	88pcs	96pcs
Rate Power	120W	150W	200W
Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
Luminous Flux	130LM/W	130LM/W	130LM/W
PF	0.92	0.92	0.92
Installation Pipe Dia	Φ60mm	Φ60mm	Φ60mm
Installation Height	8-10m	10-12m	10-12m
Net Weight	10.5kg	10.5kg	10.7kg
Gross Weight	12kg	12kg	12.2kg
Product Size	828*377*139mm	828*377*139mm	828*377*139mm
Packing Size	850*420*200mm	850*420*200mm	850*420*200mm

Light Distribution Curve

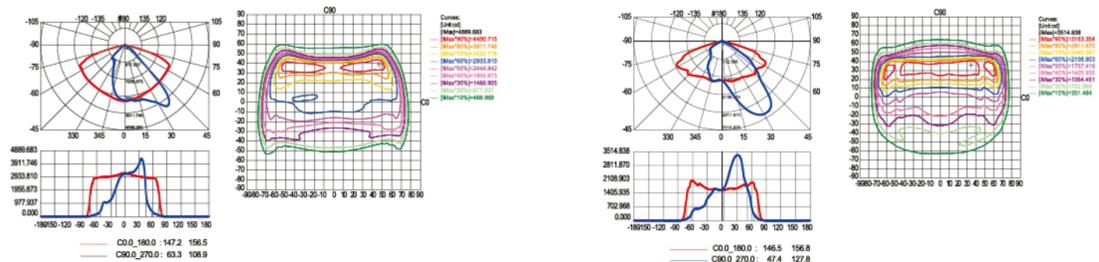

Packing size is outer size of box
All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.

TUNDRA

TUV CE C-TICK

JD-1047 LED STREET LIGHTS

Vertical and horizontal installation both ok.

PERSONALIZED CONFIGURATION

Internal components are configured according to customer requirements, meet the personalized needs



Photocell available
Lamp will Auto turn on and off according to lux difference.



Imported breather
Lamp breather ensures air balance inside and outside of the lamp which improved lamp service life.



Power turn off protector
Auto Switch cut power when opening light, more safety.



Detachable connect base
Disassemble easily which reduces maintenance costs.



LED power supply
A variety of power drive is optional



Lightning protection device
To provide more reliable guarantee for LED drive power, extend the life of the product.



Modular LED lens design
Optical light distribution curve have two choices.



Packing size is outer size of box
All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.